



- This tank is commonly the jewelers' choice for performing most soldering, brazing and small casting operations.
- Requires a regulator with a CGA 540 tank connection.
- Use a tank carrier to secure and transport your tanks safely and conveniently.

Size: R (20 cu. ft.)
Style: Oxygen

- KS08-0001 2L OXYGEN
- KS08-0002 4L OXYGEN
- KS08-0003 6L OXYGEN
- KS08-0004 8L OXYGEN
- KS08-0005 10L OXYGEN
- KS08-0006 20L OXYGEN
- KS08-0007 40L OXYGEN



- This MC tank provides standard capacities for most jewelry manufacturing needs.
- Requires a regulator with a CGA 200 tank connector.
 - MC tanks hold 10 cu. ft. of acetylene.

Size: MC (10 cu. ft.)
Style: Acetylene

- KS08-0008 2L ACETYLENE
- KS08-0009 6L ACETYLENE
- KS08-0010 8L ACETYLENE
- KS08-0011 10L ACETYLENE



SEAMLESS STEEL CYLINDER

Item	Nominal Outsider Diameter Do(mm)	Nominal Water Capacity V(mm)	Nominal Height (without valve) L(mm)	Nominal Weight (without valve.cap)W(kg)
T121-3.2-15	121	3.2	401.5	4.98
A121-4-15	121	4	485	6.16
A121-4-15	121	4	481.5	5.95
A140-4-15	140	4	389	5.7
A140-5-15	140	5	464	7.52
A140-6.3-15	140	6.3	564	8.72
A140-7-15	140	7	614	9.84
A140-8-15	140	8	690	10.72
A152-7-15	152	7	540	9.57
A152-8-15	152	8	600	10.66
A140-10-15	140	10	834	13.9
A152-10-15	152	10	726	12.6
A159-10-15	159	10	805	14.15
A159-12-15	159	12	783	16.34
A159-15-15	159	15	963	19.66
A219-40-15	219	40	1355	56
A232-40-15	232	40	1225	54
A232-50-15	232	50	1495	65.5



SEAMLESS STEEL CYLINDER

Item	Nominal Outsider Diameter(mm)	Nominal Water Capacity V(mm)	Nominal Height (without valve) L(mm)	Nominal Weight (without valve.cap)W(kg)
A108-1.4-15	108	1.4	238	2.96
A108-2-15	108	2	320	3.75
T108-2-15	108	2	324	3.72
A121-3.2-15	121	3.2	390	5.02



DISSOLVED ACETYLENE CYLINDERS

Item	Water volume (L)	Outside Diameter (mm)	Wall Thickness (mm)	Filling Weight of Acetone Kg	Filling Weight of Acetylene Kg	Total Height (mm)	Bare Weight (kg)
159-8	8	159	4.5	2.73	1.36	708	15
159-10	10	159	4.5	3.42	1.71	826	18
235-25	25	243	4	8.55	4.5	790	42
235-35	35	243	4	12	6.3	1017	50
250-40	40	258	4	13.6	6.8	1045	50
300-60	60	309	4.5	20.5	10.8	1100	56



LIQUEFIED PROYLENE (PROPANE) CYLINDERS

Volume(L)	Filling Medium	Inner Diameter	Height	Weight	Charging Capacity
13	C ₃ H ₈ C ₃ H ₆	200	600	10	5.3/5.4
26	C ₃ H ₈ C ₃ H ₆	250	745	21	10.6/10.9
40	C ₃ H ₈ C ₃ H ₆	250	1045	28	16.4/16.8
74	C ₃ H ₈ C ₃ H ₆	300	1260	41	30/31
100	C ₃ H ₈ C ₃ H ₆	350	1308	53	41/42
125	C ₃ H ₈ C ₃ H ₆	400	1273	56	50/51
400	C ₃ H ₈ C ₃ H ₆	600	1780	258	164/168
1000	C ₃ H ₈ C ₃ H ₆	900	2000	502	410/420



Type	Porduct	Working Pressuer wp/Mpa	Medium	DN mm	Outlet Thread	Inlet Thread	Safety Temperature Pressure Mpa
QF-2	Flapper Type Valve	O ₂ ,Air,N ₂	15	4	G5/8	GB8335 PZ27.8	21±1.5
QF-2B	Flapper Type Valve	O ₂ ,Air,N ₂	15	4	G5/8	GB8335 PZ27.8	21±1.5
QF-2B3	Flapper Type Valve	O ₂ ,Air,N ₂	15	4	G5/8	3/4-14-NGT	21±1.5
QF-2C	Flapper Type Valve	O ₂ ,Air,N ₂	15	4	G5/8	GB8335 PZ27.8	NO
QF-2D	Flapper Type Valve	O ₂ ,Air,N ₂	15	4	(FEMALE)G5/8	GB8335 PZ27.8	NO
QF-2G	Flapper Type Valve	O ₂ ,Air,N ₂	15	4	(FEMALE)G5/8		21±1.5
QF-6	Flapper Type Valve	O ₂ ,Air,N ₂	15	4	(FEMALE)G5/8	GB8335 PZ27.8	21±1.5
QF-8	Flapper Type Valve	O ₂ ,Air,N ₂	15	4	G1/2	GB8335 PZ27.8	NO
QF-8A	Coupling Type Valve	O ₂ ,Air,N ₂	15	4	W21.8x1/14	GB8335 PZ27.8	NO
QF-8B	Coupling Type Valve	O ₂ ,Air,N ₂	15	4	W22x1/14		NO
QF-11	Diaphragm Type Valve	O ₂ ,Air,N ₂	15	2	W21.8x1/14	GB8335 PZ19.2	NO

Oxygen & Acetylene Twin Welding Hose

Application:

For delivery of Oxygen-Acetylene gas in general industry application as cutting, welding etc.
Grade R or T also available.

Construction:

Tube: Natural rubber(SBR), or neoprene compound according on request.
Cover: Natural rubber(SBR), or neoprene, resist abrasion and sunlight/weather.
Color: Green or blue for Oxygen; Red for AcetyleneTemp.
Rang: -40℃-- +90℃
Packing: PVC film wrapped , shrinked with card, carton,

Inside ID mm	Working Pressure (WP)Mpa	Burst Pressure (BP)Mpa	Packing meter/roil
6	0.3	0.9	Requested
8	0.3	0.9	
9	0.3	0.9	
10	0.3	0.9	
13	0.3	0.9	

LPG <Propane> /Natural Gas Hose

Application:For gas discharging industry,home burner system,grills, heaters and automobile services.

Contruction:Tube:Synthetic rubber compound, LPG gas,oil and low temp,resistant.
Cover:Synthetic rubber.
Color:Can be Black.
Reiforcement:Multiple fiber,wire or stainless steel braids.
Temp. Rang: -40℃-- +60℃
Color also can be black.

Inside ID mm	Inside ID Inch	Working Pressure (WP)Mpa	Burst Pressure (BP)Mpa	Packing meter/roil
5	3/16"	1.2	6	Requested
6	1/4"	1.2	6	
8	5/16"	1.2	6	
10	3/8"	1.2	6	

ID	Inner Dia	Out Dia	Length	Gross Weight	Working Pressure	Burst Pressure	Packing(D*H)
inch	mm	mm	m	kg/roll	Bar	Bar	mm*mm
5/32	4	8	100	4.5	9	50	300*120
1/4	6	10	100	6	8	45	340*140
3/8	10	14	100	9	5	35	400*150
1/2	12	16	100	11	7	38	450*160
1/2	13	17	100	11.5	5	30	450*190
5/8	16	20	50	7	5	28	480*170
5/8	16	20	100	14	5	28	550*170
3/4	19	24	50	10	4	25	560*170
3/4	19	24	100	20	4	25	630*200
5/6	22	27	50	11.2	4	23	620*170
1	25	30	50	13.5	4	23	690*200
1	25	30	100	27	4	23	760*260
2	50	59	40	38	3	13	1060*210



KS18-0001



KS18-0002



KS18-0003



KS18-0004
PVC HOSE




KS18-0005
WATER HOSE

KS19-0001



Tip cleaner
100mm

KS19-0003



Tip cleaner
80mm

KS19-0005



Tip Drill Kit

KS19-0007



Triple Flint Lighter

KS19-0009



Round
Single Flint Lighter

KS19-0011



Flint Set

KS19-0013



Pluse Lighter

KS19-0002



Tip cleaner
120mm

KS19-0004



Tip cleaner

KS19-0006



Four way
Pick-up Kit

KS19-0008



Square
Single Flint Lighter

KS19-0010



Pistol Lighter

KS19-0012



Tri-Flint

KS19-0014



Tip Drill kit

KS19-0015



Round Soapstone

KS19-0017



Flat Soapstone

KS19-0019



Round Soapstone

KS19-0021



Spanner
7x7 or 8x8

KS19-0023



Spanner

KS19-0025



Spanner

KS19-0027



Wrench

KS19-0016



Flat Soapstone
Holder

KS19-0018



Flat Soapstone
Holder

KS19-0020



Spanner

KS19-0022



Spanner

KS19-0024



Spanner

KS19-0026



Spanner

KS19-0028



Wrench

KS19-0029



Wrench

KS19-0031



Wrench

KS19-0033



Chipping Hammer
300g/500g

KS19-0035



Chipping Hammer

KS19-0037



Cylinder Cap

KS19-0039



Cylinder Cap

KS19-0041



Cylinder Cap

KS19-0030



Wrench

KS19-0032



Wrench

KS19-0034



Pin Key Ring

KS19-0036



C-Clamp 3"4" 5"

KS19-0038



C-Clamp 3"4" 5"

KS19-0040



Cylinder Cap

KS19-0042



Cylinder Cap

KS19-0043



Gas saver

KS19-0044



Circler Cutting Attachment

KS19-0045



LPG Valve

KS19-0046



Y-valve OXY

KS19-0047



Y-valve ACE

KS19-0048



Hose Splicer 3/8",
5/8", 3/16", 1/4"

KS19-0049



Nipple & nuts
G3/8
9/16

KS19-0050



Nipple & nuts

KS19-0051



Cow Leather
Sleeves

KS19-0052



Cow Leather
Apron

KS19-0053



Adapter

KS19-0054




Adapter

KS19-0055




Adapter

KS19-0057



Adapter

KS19-0059



Adapter

KS19-0061



Adapter

KS19-0063



Adapter

KS19-0065



Adapter

KS19-0056



Adapter

KS19-0058




Adapter

KS19-0060



Adapter

KS19-0062



Adapter

KS19-0064



Adapter

KS19-0066



Adapter




CYLINDER ADAPTORS

ACCESSORIES




G5/8" (R) TO CGA540

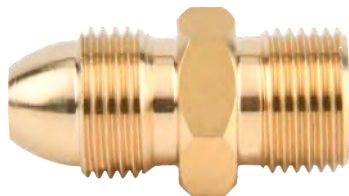


CGA320 TO CGA540



CGA992 TO 1/4"MF

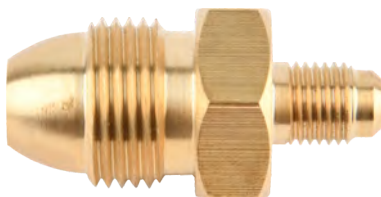

G5/8"(L) TO CGA600

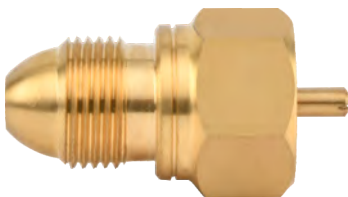

1/4" TO BSP3/8"



CGA009 TO CGA540



9/16" TO 3/8"-24



CGA300 TO CGA510



CGA540 TO CGA009



CGA520 TO CGA510





KS19-0067

Quick and easy on-the-spot hose refitting and repair
Repair hoses with nipple fittings and nuts
4P003-0078 Crimping Tools for 3/16", 1/4" I.D. hose
Compartmented plastic box



KS19-0068

Quick and easy on-the-spot hose refitting and repair
Repair hoses with nipple fittings and nuts
4P003-0082 Crimping Tools for 3/16", 1/4" I.D. hose
Compartmented plastic box



KS19-0069

Two Hole Jaw 1/2" Wide
Use on 3/16", 1/4" Hose



KS19-0070

Two Hole Jaw 1/2" Wide
Use on 3/16", 1/4", 3/8" Hose



KS19-0071

Two Hole Jaw 1/2" Wide
Use on 3/16", 1/4" Hose



KS19-0072

Heavy-Duty Ferrule Crimp Machine
Die Sizes: 0.48", 0.52", 0.58", 0.62", 0.67"



KS19-0073

Two Hole Jaw 5/8" Wide,
Use on 3/16", 1/4" Hose



KS19-0074

Hose Ferrules 3/16", 1/4"
Hose Nuts 9/16"-18 Thread CGA-023
Hose Nuts 9-16"-18 Thread CGA-022



KS19-0075

Hose Splicer 3/16"
Hose Splicer 1/4"



KS19-0076

Hose Brace 3/16"
Hose Brace 1/4"



KS19-0077

Hose Coupler 1/4" NPT TO B-Size RH/LH



KS19-0078 BRASS HOSE FERRULES

PART NO.	INSIDE DIA.	LENGTH	PART NO.	INSIDE DIA.	LENGTH
6231	0.33"	1/2"	7327	0.625"	1"
833	0.358"	1/2"	H-H	0.650"	1/2"
622	0.38"	1/2"	7328	0.656"	1"
620	0.41"	1/2"	G-G	0.675"	33/64"
769	0.45"	9/16"	7329	0.687"	1"
4750	0.478"	11/16"	F-F	0.70"	33/64"
624	0.50"	1/2"	7330-B	0.718"	1"
7322	0.50"	1"	E-E	0.725"	17/32"
625	0.525"	1/2"	7331	0.750"	1"
7323	0.525"	1"	C-C	0.775"	17/32"
626	0.548"	31/64"	7332	0.781"	1"
7325	0.562"	1"	7333	0.812"	1"
3588	0.564"	3/4"	7244-A	0.875"	27/32"
K-K	0.575"	31/64"	5029-A	0.90"	27/32"
7326	0.593"	1"	7242-A	0.937"	27/32"
J-J	0.60"	1/2"	5028-A	0.975"	27/32"
I-I	0.625"	1/2"			