



WEED BURNER

Superbioflamme

Blow torch with high heating capacity for use with refillable LPG bottles, provided with a 600 mm extension tube and a 60 mm burner for a wider flat-flame.

Consists of:
handgrip with or without gas-saving lever with lance and burner support hook

Available also in following versions:

SUPERBIOFLAMME 5000

5 m 4x11 DK6 hose with connections



KS22-0001



KS22-0002



KS22-0005



KS22-0006



KS22-0007



EN521:2006

SUPERBIOFLAMME 5000 TK

Consists of:

- handgrip with or without gas-saving lever with lance and burner
 - support hook
 - 5 m 4x11 DK6 hose with connections
 - trolley
 - 2,5 bar /6-8 kg regulator
- Regulators available with any connection

KS22-0052



KS22-0053



EN521:2006

- 500,000 BTU output
- Solid brass valve for flame adjustment
- Can be with 10' LP gas hose
- Works with 20, 50 or 100 lb. propane cylinders
- Excess flow safety valve

These torches make home, farm, industrial and construction work easier. Can be used to repair road surfaces, remove paint, burn brush, weeds and stumps. Can also be used to melt snow and ice. Torch is also melts tar and asphalt and is good for various roofing applications. Ideal for use around the home and garden. Homeowners can now kill weeds, or melt ice, safely and naturally- without exposing children or pets to chemicals.

Stainless Steel Extension

Length:7.5cm,10cm,15cm,20cm,35cm,50cm,60cm,75cm,100cm or as per your requirement.

KS22-0056



KS22-0057



KS22-0058



KS22-0059



KS22-0060



KS22-0061
Ø50mm


KS22-0062
Ø50mm

KS22-0063
Ø50mm


KS22-0064
Ø50mm

Specitifications:

Total Length	Diameter	Gas Flow	Weight
(cm)	(mm)	Gr/h	(kg)
91	50	2000	0.9
91	50	2000	0.9
68	50	2000	0.7
68	35	450	0.8

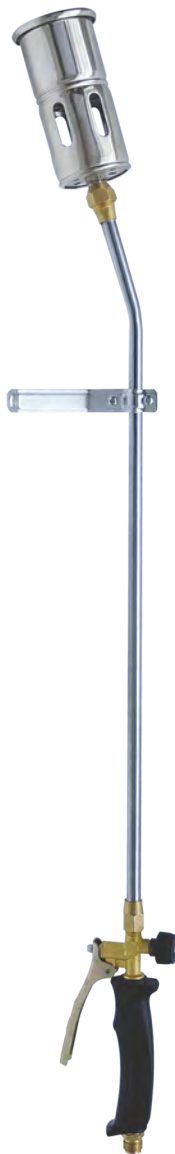

KS22-0066

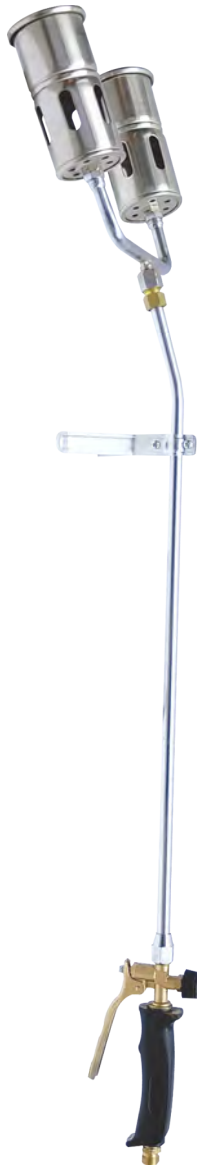

KS22-0067



KS22-0068

Specitifications:

Total Length	Diameter	Gas Flow	Weight
(cm)	(mm)	Gr/h	(kg)
92	60	2000	0.5
92	60	2500	0.7
92	2*60	4500	0.8
83	60	2500	0.8



KS22-0069
Ø60mm



KS22-0070
Ø50mm

Specitifications:

Total Length	Diameter	Gas Flow	Weight
(cm)	(mm)	Gr/h	(kg)
92	60	5000	0.9
91	50	2000	0.9
92	60	2000	0.9





Spectifictions:

Total Length	Diameter	Gas Flow	Weight
(cm)	(mm)	Gr/h	(kg)
92	60	2000	0.5
92	63	2500	0.9
72	50	2500	0.7
38	38	2000	0.6
50	25-38-50	2000	0.9




Spectifictions:

Total Length	Diameter	Gas Flow	Weight
(cm)	(cm)	Gr/h	(kg)
48	35	450	0.3
48	35	450	0.4
70	50	2000	0.4
70	50	2000	0.4
50	35	450	0.3
90	2*50	2000	0.6
90	2*50	2000	0.6

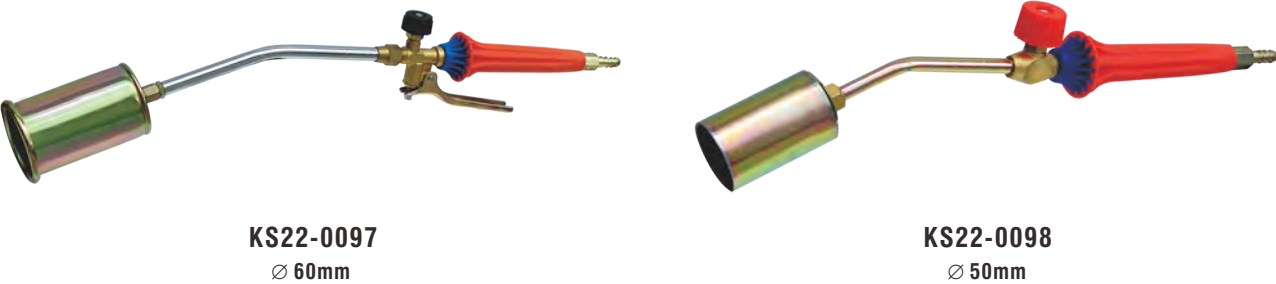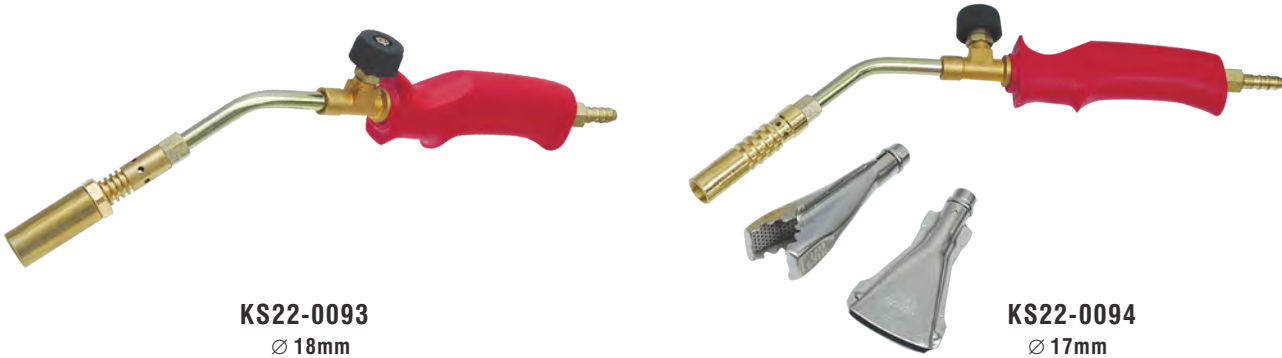

Spectifictions:

Total Length	Diameter	Gas Flow	Weight
(cm)	(mm)	Gr/h	(kg)
37	18	350	0.3
37	17-22-40	260	0.6
40	20	260	0.5
33	200g copper	260	0.9
58	60	2500	0.7
45	50	2000	0.5

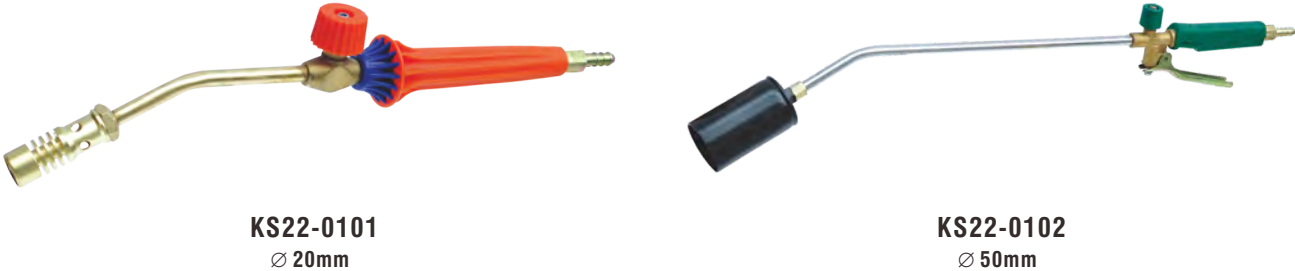

Spectifictions:


Total Length	Diameter	Gas Flow	Weight
(cm)	(mm)	Gr/h	(kg)
35	22	260	0.4
36	22	260	0.4
35	20	260	0.4
40	50	2000	0.5
35	7-17	550	0.5
35	35	260	0.5



KS22-0105
Ø 17/14/13mm



KS22-0106
Ø 17 200g

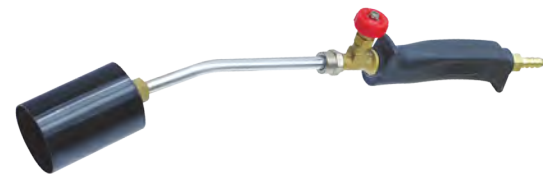

KS22-0107
Ø 50mm



KS22-0108
Ø 50mm




KS22-0109
Ø 35mm




KS22-0110
Ø 50/35/25mm



KS22-0111
Ø 60mm

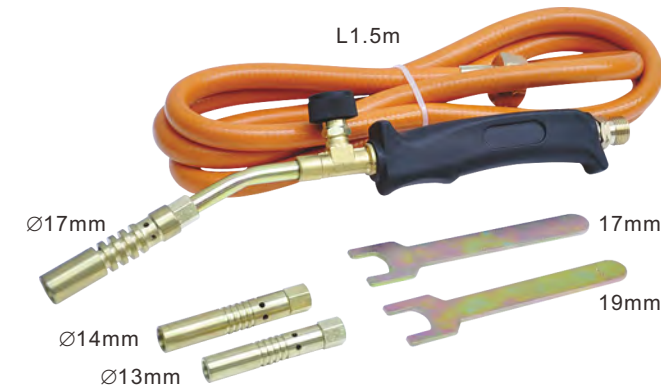


KS22-0118

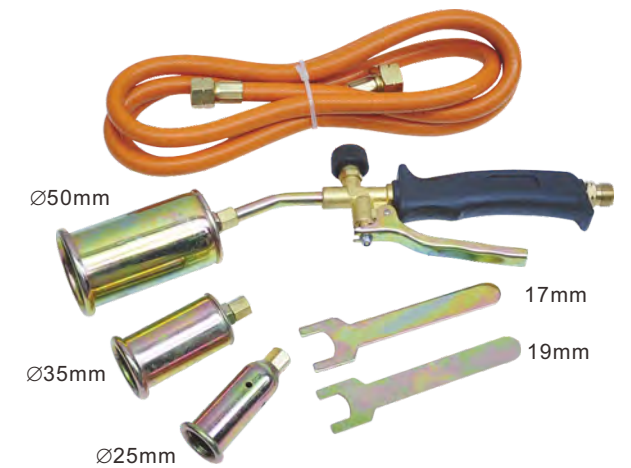


KS22-0119




KS22-0124

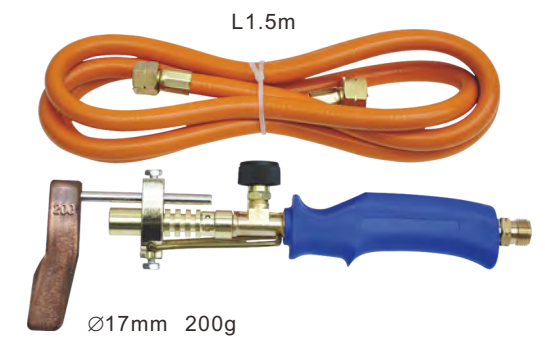

KS22-0126

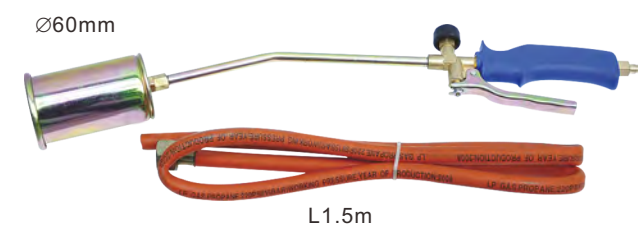

KS22-0127

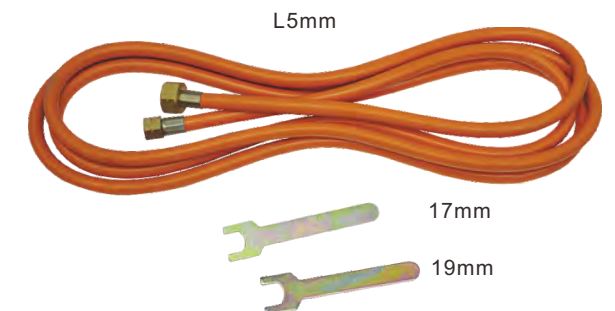

KS22-0128



KS24-0001



KS24-0002



KS24-0003

TurboTorch Extreme Standard Torch Kit
Quick-disconnect Couplings
Color Coded "O" Rings for Quick Gas Identification
General Included Features
Silver brazes to 1" (30mm)
Instruction Manual
Tip
CGA 200 Regulator Handle
AH-12 Hose
Soft solders to 2" (50mm)
MC Tank Connection
A-8 Tip
Valve Position
Industrial Applications
High capacity applications
HVAC Process(es)
Air Acetylene



KS24-0013



KS24-0014



3.6M 3/16" GRADE R WELDING
HOSE MAX.W.P. 300PSI
MEETS RMA/CGA
KS24-0015



KS24-0016 XB3



KS24-0017 XB4



KS24-0018 XB5



MAPP & PROPANE TORCH



KS25-0003

KS25-0004

KS25-0005

KS25-0006

The Instant On/Off trigger ignition provides easier lighting and increased fuel savings. The Large, Optimized swirl flame burns hotter for maximum heat output that provides a 30% faster soldering time. The adjustable flame control allows for a more precise flame for various applications and the run lock button keeps the torch lit for finger free use.

The torch is pressure regulated to burn in any direction with consistent performance. The torch is made with a cast aluminum body for added durability.

Trigger Start Torch features an instant on-off trigger that improves fuel savings and convenience. It has a lock button which keeps the torch lit for finger-free use and produces swirl flame for maximum heat output. This torch has pressure which is regulated to burn in all directions. It is made from cast aluminum which ensures extreme durability. This torch is of multi-application and can be used with propane fuel.



Self Igniting Heat Shrink Torch is designed with a wide burn tip for heat shrink applications. The Torch is made with Cast Aluminum construction for durability, a solid brass regulator for efficient fuel regulation and targeted heat output for accurate and efficient performance.

- Swirl flame.
- Self-igniting trigger start.
- Adjustable swirl flame.
- Ultra swirl flame.
- Heat shrink large diameter flame.

KS25-0007

KS25-0008

KS25-0009

KS25-0010



KS25-0011



KS25-0012

- Swirl flame provides a hotter, more efficient flame -
- Instant on/off trigger igniter with simple one-handed operation
- Lock button keeps torch lit for finger-free use -Cast aluminum body for durability

Heavy Duty Torch Poropane/MAPP

- Full Brass Body.
- Designed to operate with a tank of either MAPP or Propane Gas.
- Popular Choice for plumbing, heating, electrical and other uses.
- Falme Control valve gives precise adjustments.
- Without the Tank.



KS25-0013A



KS25-0013B



KS25-0014A



KS25-0015



KS25-0016



KS25-0013



KS25-0014



KS25-0017



KS25-0018



KS25-0020



KS25-0021



KS25-0022



KS25-0023



KS25-0024



KS25-0025



MAPP Hand Torch Cylinder

Ideal for medium to heavy soldering and brazing.
Flame temperature in air = 3,600 degrees (F)
Net weight 16 oz./453.6 gm.

Propane Hand Torch Cylinder

Ideal for general soldering.
Flame temperature in air = 3,450 degrees (F)
Net weight 14 oz./400 gm.

KSWELD makes a hand torch for just about every job on the planet. Whether it's soldering a pipe, stripping paint, crafting a masterpiece our easy-to-use hand torches can't be beat for versatility, durability, and safety.

KSWELD professional torches are designed for heavy duty jobs using MAPP or propane fuel. In addition to light duty tasks, professional torches provide higher heat output for applications like brazing and hard soldering. Professional torches feature swirl flame technology that mixes fuel to burn more efficiently in the primary flame creating higher working temperatures which completes the job faster.





KS26-0002



KS26-0003



KS26-0004

Multifunction blowlamp

The multifunction blowlamp designed for copper brazing and tin brazing, represents what is more practical and easier to use in the brazing torch category. With its piezo ignition, this blowlamp has a great autonomy (> 1h15 mn) as well as an ergonomic handle giving the professional a better grip on the blowlamp.

Brazing capacity

With Cu Ph fluid:Ø14 With Tin fluid 40%: Ø14 With Cu Ph 30% Ag fluid:Ø16 With Sn 97% Cu 3% fluid: Ø50

Power (kw):1.6
Autonomy (hour):1h30

Flame

Type: Sharp tip Dimensions: Ø6×60 mm int. Diameter. Burner nozzle: Ø16mm False flame length: 170 mm

Flame temperature (°F):3362°F
Flow (g/h) at 1.5 bar:110
Energy:Butane gas



KS26-0007

PIZEO YES	°C 1000	gr/h 86	kg 0.58	PCS./PZ 20



KS26-0011

PIZEO NO	°C 1000	gr/h 86	kg 0.47	PCS./PZ 20



KS26-0013

PIZEO YES	°C 1000	gr/h 86	kg 0.58	PCS./PZ 20



KS26-0008

PIZEO YES	°C 1000	gr/h 86	kg 0.50	PCS./PZ 20



KS26-0011A

PIZEO YES	°C 1000	gr/h 86	kg 0.47	PCS./PZ 20




KS26-0014

PIZEO NO	°C 1000	gr/h 86	kg 0.23	PCS./PZ 20

BLOW TORCH



KS26-0017 Adapter



KS06-0018 Adapter



KS06-0019 Adapter



KS26-0020



Dimension 121x31.5x43mm
Weight 191+9g
Ignition Manual lit
Fuel Butane(Nozzle type gas canister)
Consumption 106/h(1,250kcal/4,987btu/1.45kw)
Material Copper + Aluminum + Zinc alloy + ABS
Connection Type Threaded port
Packaging One pas on bubble pack, Within the box outside the box, 100 a/box



KS26-0020A



Dimension 130x42x55mm
Weight 176+6g
Ignition Manual lit
Fuel Butane(Nozzle type gas canister)
Consumption 106/h(1,250kcal/4,978btu/1.45kw)
Material Copper + Aluminum + Zinc alloy + ABS
Connection Type Bayonet type
Packaging Single-sided blister, Paper card, Within the box outside the box, 100 a/box



KS26-0021



Dimension 185x70x40mm
Weight 114.7g
Ignition Manual lit
Fuel Butane(Nozzle type gas canister)
Consumption 120/h(1,420kcal/5,636btu/1.65kw)
Material Copper + Aluminum + Zinc alloy + ABS
Connection Type Bayonet type
Packaging Single-sided blister, Paper card, Within the box outside the box, 100 a/box



KS26-0022



Dimension 20x70x40mm
Weight 97+9g
Ignition Manual lit
Fuel Butane(Nozzle type gas canister)
Consumption 258/h(3,060kcal/1,2120btu/3.55kw)
Material Copper + Aluminum + Zinc alloy + ABS
Connection Type Bayonet type
Packaging Single-sided blister, Paper card, Within the box outside the box, 100 a/box

BLOW TORCH



KS27-0001

Color: black, red, blue
Size: 130x74x205mm
Unit weight: 291g
Gas capacity: 20g
Type of gas: butane
Highest temperature: 1300°C



KS27-0002

Color: black/Camouflage
Size: 130x74x205mm
Unit weight: 380g
Gas capacity: 20g
Type of gas: butane
Highest temperature: 1350°C



KS27-0003

Color: silver/black/gun metal
Size: 114x59x195mm
Unit weight: 255.8g
Gas capacity: 15g
Type of gas: butane
Highest temperature: 1300°C



KS27-0004

Color: black, silver
Size: 120x59x197mm
Unit weight: 288.4g
Gas capacity: 15g
Type of gas: butane
Highest temperature: 1300°C



KS27-0005

Color: black, silver, purple/ blue
Size: 135x60x187mm
Unit weight: 245.5g
Gas capacity: 16.5g
Type of gas: butane
Highest temperature: 1300°C



KS27-0006

Color: red/ black/ silver
Size: 141x59x209mm
Unit weight: 287.2g
Gas capacity: 15g
Type of gas: butane
Highest temperature: 1350°C



KS27-0007

Color: black
Size: 102x41x113mm
Unit weight: 125g
Gas capacity: 6g
Type of gas: butane
Highest temperature: 1250°C



KS27-0008

Color: black
Size: 90x60x134mm
Unit weight: 152.4g
Gas capacity: 8g
Type of gas: butane
Highest temperature: 1200°C




KS27-0009

Color: red/orange
Size: 95x72x149mm
Unit weight: 127g
Gas capacity: 10g
Type of gas: butane
Highest temperature: 1250°C



KS26-0023

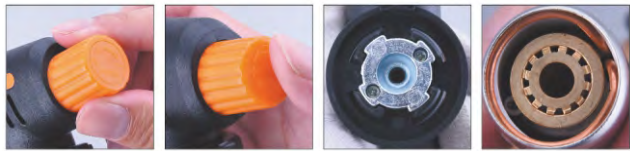

Dimension 155x60x40mm
Weight 138+9g
Ignition High-energy porcelain pressure ignition
Fuel Butane(Nozzle type gas canister)
Consumption 108/h(1,250kcal/4,978btu/1.45kw)
Material Copper+Aluminum+Zinc alloy+Stainless+ABS
Connection Type Bayonet type
Packaging Single-sided blister, Paper card, Within the box outside the box, 100 a/box



KS26-0023A



Dimension 158x60x29mm
Weight 146.4g
Ignition High-energy porcelain pressure ignition
Fuel Butane(Nozzle type gas canister)
Consumption 106/h(1,250kcal/4,978btu/1.45kw)
Material Copper+Aluminum+Zinc alloy+Stainless steel+ABS
Connection Type Threaded port
Packaging Single-sided blister, Paper card, Within the box outside the box, 100 a/box



KS26-0024



Dimension 168x67x50mm
Weight 128+9g
Ignition High-energy porcelain pressure ignition
Fuel Butane(Nozzle type gas canister)
Consumption 80/h(946kcal/5,636btu/1.65kw)
Material Copper+Aluminum+Zinc alloy+ABS
Connection Type Bayonet type
Packaging Single-sided blister, Paper card, Within the box outside the box, 100 a/box



KS26-0024A



Dimension 170x65x50mm
Weight 119g
Ignition High-energy porcelain pressure ignition
Fuel Butane(Nozzle type gas canister)
Consumption 80g/h(946kcal/3,757btu/1.45kw)
Material Copper+Aluminum+Zinc alloy+ABS
Connection Type Threaded port
Packaging One pas on bubble pack, Within the box outside the box, 100 a/box



KS26-0025



Dimension 316x60x40mm
Weight 192+8g
Ignition High-energy porcelain pressure ignition
Fuel Butane(Nozzle type gas canister)
Consumption 120/h(1,250kcal/4,978btu/1.46kw)
Material Copper+Aluminum+Zinc alloy+Stainless+ABS
Connection Type Bayonet type
Packaging Single-sided blister, Paper card, Within the box outside the box, 48 a/box



KS26-0025A



Dimension 200x60x40mm
Weight 125+4g
Ignition High-energy porcelain pressure ignition
Fuel Butane(Nozzle type gas canister)
Consumption 120/h(1,250kcal/4,978btu/1.46kw)
Material Copper+Aluminum+Zinc alloy+Stainless steel+ABS
Connection Type Bayonet type
Packaging Single-sided blister, Paper card, Within the box outside the box, 100 a/box



KS26-0026



Dimension 170x65x50mm
Weight 119g
Ignition High-energy porcelain pressure ignition
Fuel Butane(Nozzle type gas canister)
Consumption 80g/h(946kcal/3,757btu/1.45kw)
Material Copper+Aluminum+Zinc alloy+ABS
Connection Type Threaded port
Packaging One pas on bubble pack, Within the box outside the box, 100 a/box



KS26-0027



Dimension 145x71x38mm
Weight 123g
Ignition High-energy porcelain pressure ignition
Fuel Butane(Nozzle type gas canister)
Consumption 80/h(946kcal/3,757btu/1.10kw)
Material Copper+Aluminum+Zinc alloy+ABS
Connection Type Bayonet type
Packaging Single-sided blister, Paper card, Within the box outside the box, 100 a/box